

modello brevettato | patented | breveté | patentiert



ottone massiccio | solid brass | laiton massif | massiv Messing

consumo idrico cascata: 18 litri/minuto | average flow rate waterfall: 18 liters/minute

consommation cascade: 18 L/min | Durchflussmenge Wasserfall: 18 L/min

pressione minima di esercizio cascata: 1 bar dinamico | waterfall minimum dynamic pressure required: 1 bar (14,5 psi)

pression minimale cascade 1 bar | mindest Druck für Wasserfall aus 1 bar

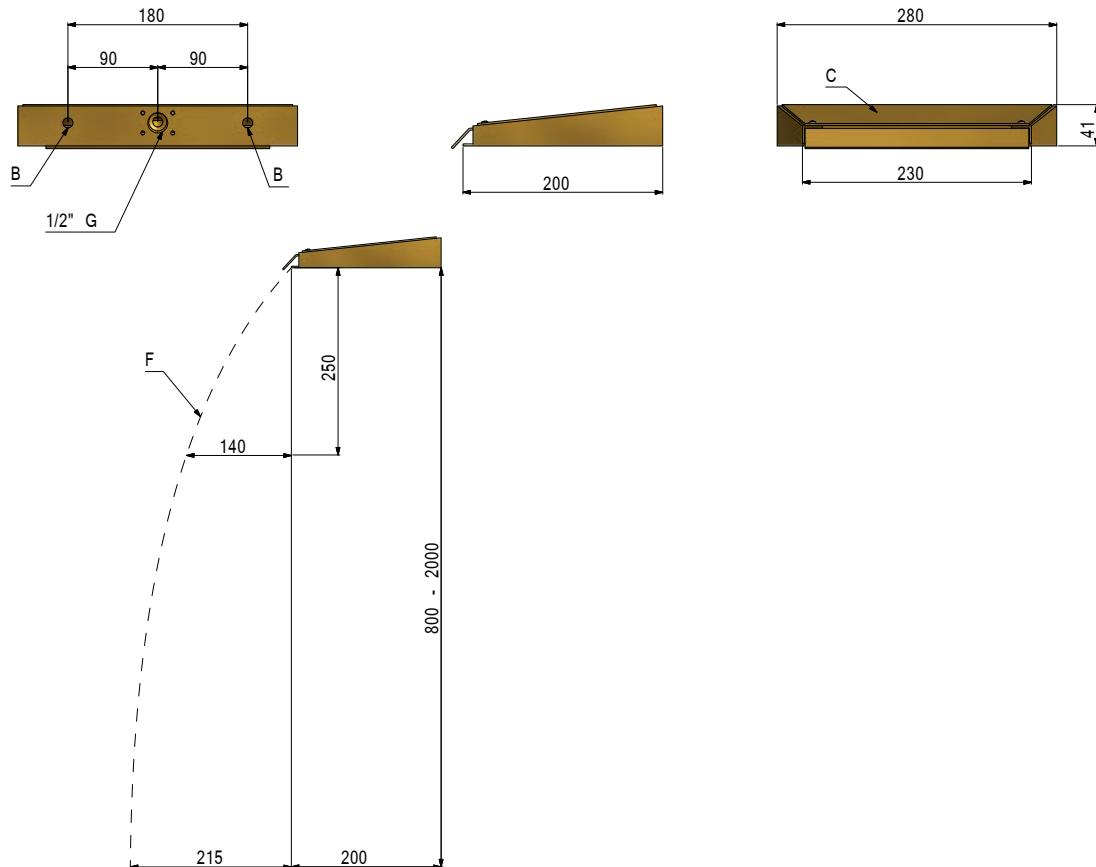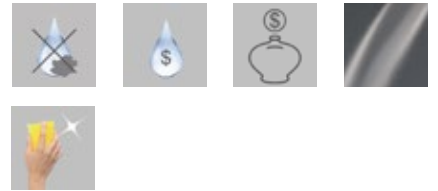

Cascata da muro trapezoidale cromata 200x280 mm trapezoidal wall mounted chrome plated waterfall.

Cascade trapézoïdale chromée 200x280 mm. Trapezförmiger Wassefall verchromt mit Wandbefestigung.



NOTE | NOTES

Distanza indicativa soffione - piatto doccia 2200 mm | Approximate distance shower head - shower tray 2200 mm

Distance suggérée pomme de tête - receveur de douche 2200 mm | Ungefährer Abstand Kopfbrause - Duschwanne 2200 mm

B - Tassello - Boss - Cheville - Dübel

C - Copertura superiore (compresa per 3V 202 1) - Upper cover (provided for 3V 202 1)

C - Bride supérieure de couverture (comprise pour 3V 202 1) - Abdeckplatte (einschließlich für 3V 202 1)

F - Flusso cascata - Waterfall flow - Flux cascade - Wasserfallausfluß